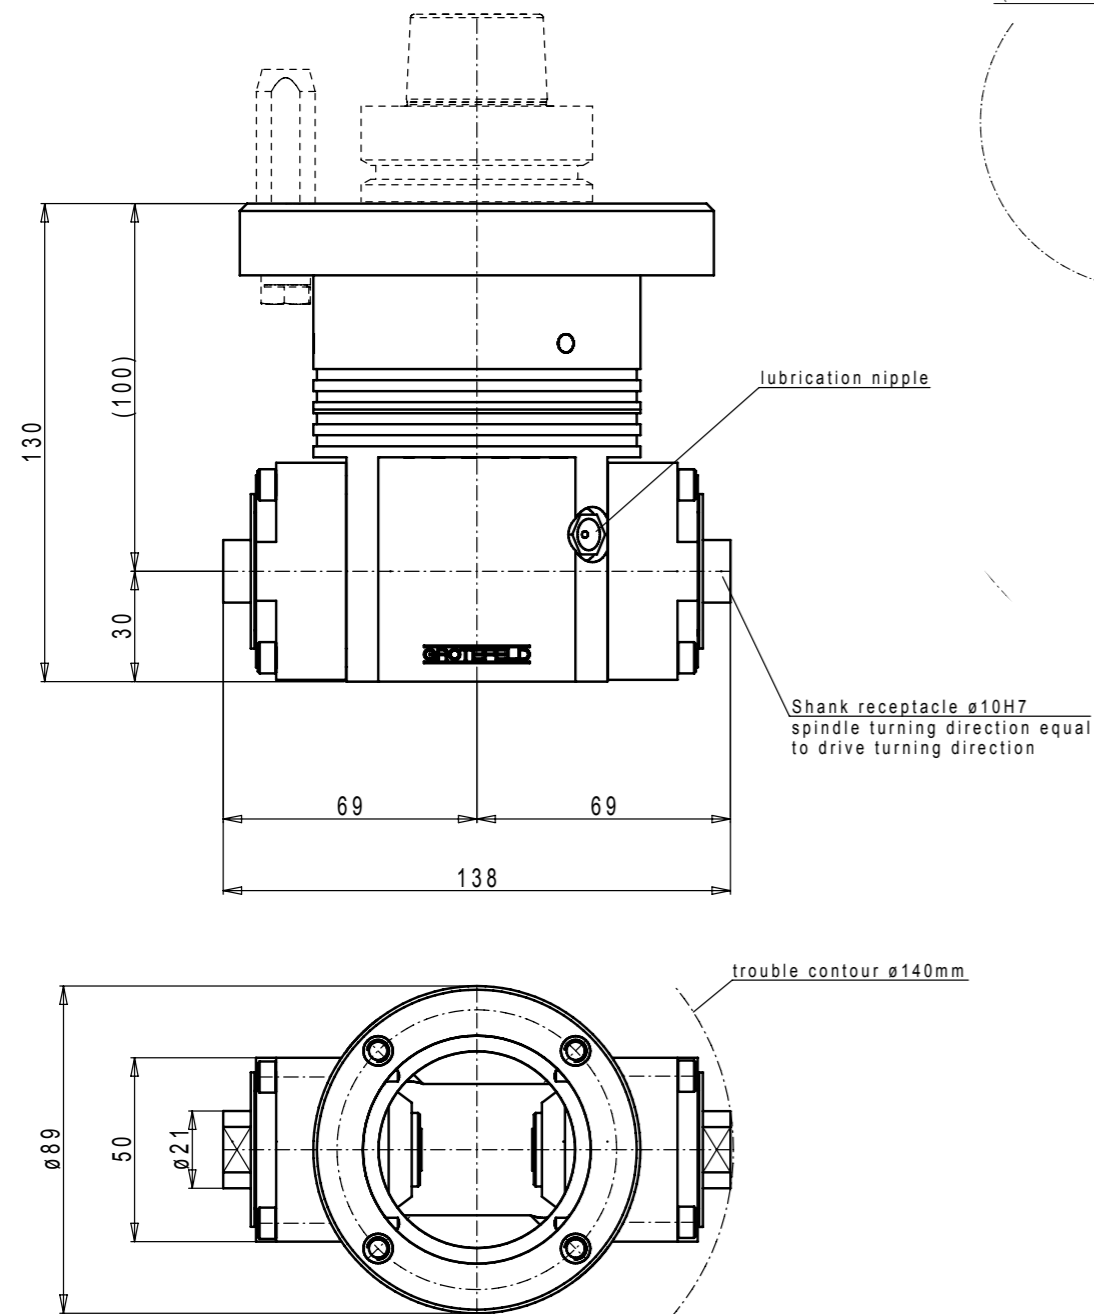



Drive adapter

Standard configurations and machine specific executions upon request

Shank receptacle $\varnothing 10$ H7

Technical features

Item Id.	EP-030315
drive turning direction	R.H./L.H.
drive speed max.	permanent operation 645 – 9.290 rpm
drive speed max.	interval operation 645 – 11.613 rpm
number of spindles	2
spindle position	horizontal
tool receptacle	$\varnothing 10$ H7
gear ratio	1 : 1,55 – wheel drive
turning direction of tool receptacle	2x equal to drive turning direction
spindle speed max.	permanent operation 1.000 - 14.400 rpm
spindle speed max.	interval operation 1.000 - 18.000 rpm
drive capacity	3,0 kW
weight with drive adapter	approx. 5,25 kg

Optional accessories:

Hexagon-wrench SW3	Item Id. 138030
Open end spanner SW17	Item Id. 131017
Lubrication press	Item Id. 980003

The angular heads of the series G03 are equipped with up to 4 processing spindles. The spindle turning direction of all tool receptacles is always equal to the drive turning direction. The drive speed is transmitted in a ratio of 1:1,55 to the tool receptacles. The maximum spindle speed in interval operation is 18,000 rpm.

Variants on demand!

