

## 波登管压力表、不锈钢压力HD版

### 概述

Excellent load-cycle stability for long period. It's suitable for chemical/petrochemical process industries, power plants and plants constructions.

It's studied for withstanding the heaviest workloads, even under demanding environmental conditions.




安德鲁信重工江苏有限公司


地址: 江苏省江阴市澄江东路3号 电话: 0510-86199978 86199979 传真: 0510-86199980  
网址: [www.andrewen.com](http://www.andrewen.com) [www.andrewen.net](http://www.andrewen.net) 邮箱: [info@andrewen](mailto:info@andrewen)

单位：毫米


DN 100/150




TYPE A




TYPE C

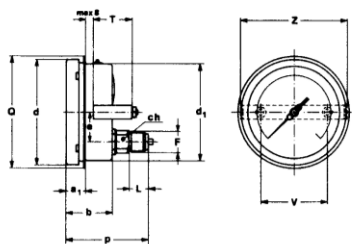

TYPE B



TYPE D

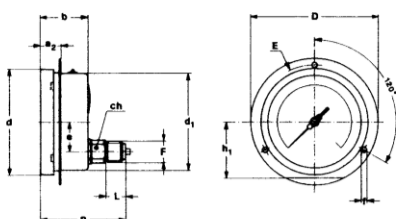

TYPE E

DN	TYPE	F	L	A	a1	b	b1	d	d1	D	E	h	P	ch
100	AC	1/2	20	13	-	48,5	52,6	110,6	101	130	118	-	-	22
100	DBE	1/2	20	13	20	48,5	-	109,8	101	130	118	86	87	22

DN	TYPE	F	L	A	A1	b	b1	d	d1	D	E	h	P	ch
150	AC	1/2	20	15	-	50,5	54	161	150	190	175	-	-	22
150	DBE	1/2	20	15	25.5	50,5	-	161	150	190	175	117	85,5	22



安德鲁信重工江苏有限公司

地址：江苏省江阴市澄江东路3号 电话：0510-86199978 86199979 传真：0510-86199980  
 网址：www.andrewen.com www.andrewen.net 邮箱：info@andrewen

## 技术参数

适用标准: EN 837-1

公称尺寸(mm): 100, 150

范围: from -1 bar up to 1600 bar

精度: 1 %

环境温度: -40+65°C

工艺流体温度: -40+150°C

工作压力: static 100% of FVS

超压: 30 % of FVS (max. 10 min.)

保护等级: IP 67 according to IEC 529

表壳: AISI 304 st.st.

密封圈: AISI 304 st.st. , bayonet lock

刻度盘: white aluminium, black markings

指针: black aluminium with micrometric resetting

表玻璃: in tempered glass, 4 mm thickness

垫圈: in EPDM

**Bourdon tubular spring** : AISI 316L st.st.

动作: stainless steel

支架: 1/2 BSP in AISI 316L st.st.

**Welding** : AISI 316 st.st. TIG Argonac

温度漂移:  $\pm 0,4\%$  /10°C of the full scale value

(taking 20°C as the datum temperature)

## 可选项

**Max drag and resettable pointer:** single or double in aluminium

**Filling liquid** :Glycerine 98 % - Silicone oil



安德鲁信重工江苏有限公司

地址: 江苏省江阴市澄江东路3号 电话: 0510-86199978 86199979 传真: 0510-86199980  
网址: www.andrewen.com www.andrewen.net 邮箱: info@andrewen